



NEW
GRIP
SPREADER TIPS

TEAM *gold*

Power
redefined



WEBERRESCUE
SYSTEMS

Power redefined! Spreader SP 53 BS

Most lightweight BS spreader (EN norm) worldwide!

With 53 kN minimum spreading force at the tips, large opening of 800 mm and only 20 kg weight, this spreader easily meets the highest requirements of the EN/NFPA standards. It is therefore ideally suited to today's automotive materials and demands!

Arms and cylinder body made of aluminium alloy, also used in aircraft manufacturing

Innovative surface hardening



Spreader tips with studs for extra grip

Foldable handle

Captive pin



What does BS mean?


Spreader classification

Type	Minimum spreading force (kN)	Minimum spreading distance (mm)
AS	20	600
BS	50	800
CS	80	500

The new SP 53 BS is classified in category BS 53/800-20.

That means a minimum force (F1) of 53 kN at tip with an opening of 800 mm and a sensational low weight of only 20 kg.

Therefore the SP 53 BS is the only BS spreader in this weight category.

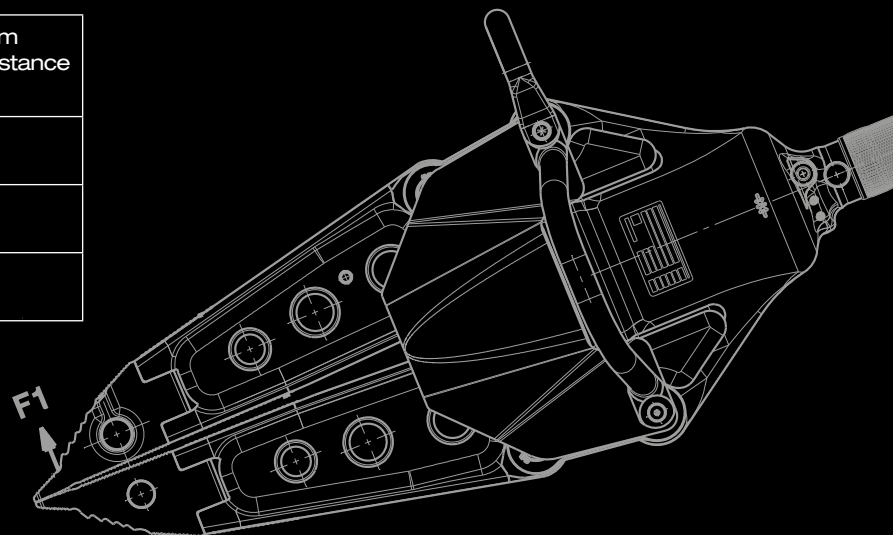

Power redefined

Spreader
SP 53 BS



- Most lightweight BS spreader (EN norm) worldwide
- Weight only 20.3 kg
- Big opening of 800 mm
- New tips with studs for extra grip
- Captive pin
- Arms and cylinder body made of aluminium alloy, also used in aircraft manufacturing
- Extended spreading area on arms
- Tested according to DIN EN 13204 and NFPA 1936

Spreading force* in working range	53 - 421 kN
Closing force*	100 kN
Spreading distance	800 mm
Weight	20.3 kg
EN class	BS 53/800-20
Part no.	1058125

Captive pin and improved studded tips for extra grip



Accessories

Replacement tip	
Weight	0.9 kg
Part no.	1068392
Chain set	
Weight	13.8 kg
Part no.	571415

WEBER-HYDRAULIK GmbH

Heilbronner Straße 30
D-74363 Güglingen
Ph. +49 (0) 7135/71-10270
Fax +49 (0) 7135/71-10396
info@weber-rescue.com
www.weber-rescue.com

Industriegebiet 3 + 4
A-4460 Losenstein
Ph. +43 (0) 7255/6237-120
Fax +43 (0) 7255/6237-12461
info@weber-rescue.com
www.weber-rescue.com

WEBERRESCUE
SYSTEMS